arXiv:1108.0990v1 [physics.soc-ph] 4 Aug 2011

Scale-Free Structure Emerging from Co-Evolution of a Network and the Concentration of Diffusive Resources on It

Takaaki Aoki[1, 2, *] and Toshio Aoyagi[1, 2]
[1] *Graduate School of Informatics, Kyoto University, Kyoto 606-8501, Japan*
[2] *CREST, Japan Science and Technology Agency, Kawaguchi, Saitama 332-0012, Japan*

(Dated: 2011-07-06)

Co-evolution involving the intricate interplay between dynamics both on and of a network is a key concept for understanding the self-organized flexible nature of real-world network systems. We propose a simple model of such co-evolving network dynamics, in which the diffusion of resources over the weighted network and the evolution of the link weights occur simultaneously. We demonstrate that, under feasible conditions, the network robustly acquires a scale-free structure characterized by power-law distributions with an exponent of -1 (Zipf's law). Our model offers a novel framework for understanding the network structures pertinent to resource distribution over a network in real-world systems.

PACS numbers: 05.65.+b, 89.75.Hc, 89.75.Fb, 05.40.Fb

Today, the term network is common in our everyday lives, in which it refers to large-scale, complex-structured, unsteady interactions in many real-world systems. These networks are not static, but changing in response to the activity of the systems existing on them. For example, in social networks, such as friendship and coauthorship, human behavior is highly influenced by social relationships, and at the same time, the relationships among people changes continually as a result of their behavior. This intricate interplay between individuals and their relationships causes emergence of the complex structures of human societies [1, 2]. Similar dynamics are exhibited by traffic networks among cities supporting the transportation of people and products. As cities develop, these networks are improved to meet the increasing needs, and in turn the improved efficiency of the traffic network facilitates further development of the cities. A similar process takes place in the case of communication networks [3]. The essence of above real-world systems resides in the co-evolving dynamics of the system interacting on the network and the underlying network structure. To understand the underlying mechanism of such dynamical network organization, we have to consider mutual interplay between dynamics both on and of a network.

In the last decade, there have been two major research trends with the goal of understanding the co-evolving dynamics described above. One focuses on the topology of the network. It is well known that real-world networks share some common topological features [4–6]. One typical feature is a scale-free structure, which means that the node degree (the total number of links connected to a node) exhibits a power-law distribution [5, 7]. To explain the emergence of such topological features, models of network evolution dynamics are widely used. The other trend is to address the nature of dynamical systems interacting on static networks. This approach reveals how the topological structure of the interactions affects on the collective behavior, such as magnetization, synchronization and spreading [8].

Most studies employing the above two approaches have focused on only one of two aspects of co-evolving dynamics: evolution of the network topology or evolution of the states on the network. We propose to integrate these two trends into a unified theory that takes account of the interplay between dynamics both of and on the network. Although there have been several studies treating the dual dynamics of such co-evolving networks [9], further systematic studies employing the point of view of dynamical systems are needed.

The aim of this paper is to propose a fundamental theoretical model to understand the nature of co-evolving dynamics. Among the possible dynamical processes on a network, diffusion is a fundamental process related to many physical and social phenomena. We thus consider diffusive resources at nodes, which may be, for example, molecules, cells, people or money. The quantity of this resource can be regarded as representing the state of the system of the nodes. For the time evolution of the network structure, we assume that the link weight changes according to a simple formula inspired by the law of mass action.

Let us consider a weighted network of N nodes, on which we consider simple co-evolving network dynamics, as illustrated in Fig. 1(a). The link structure of the network is defined by the adjacency matrix a_{ij}, in which a_{ij}=1 if a link between the nodes i and j exists and 0 otherwise. We assign a time-dependent weight $w_{ij}(t)$ to each existing link ($a_{ij} = 1$). This weight represents the strength of the interaction. In addition, we assume that these weights are symmetric, i.e., $w_{ij}(t) = w_{ji}(t)$. On this weighted network, we assume that some diffusive resource exists in some quantity of each node, denoted by $x_i(t)$ ($i = 1, 2, \cdots, N$). The diffusion process can be understood as the diffusion of many random walkers, in which the walkers at the node i move to the neighboring node j in accordance with the time-dependent weighted probability $w_{ji}(t)/s_i(t)$. Here, $s_i(t)$ is the strength of the node i defined by $s_i(t) \equiv \sum_{j\in\mathcal{N}_i} w_{ji}(t)$, where $\mathcal{N}_i$ is the set of nodes connected with the node i. The master

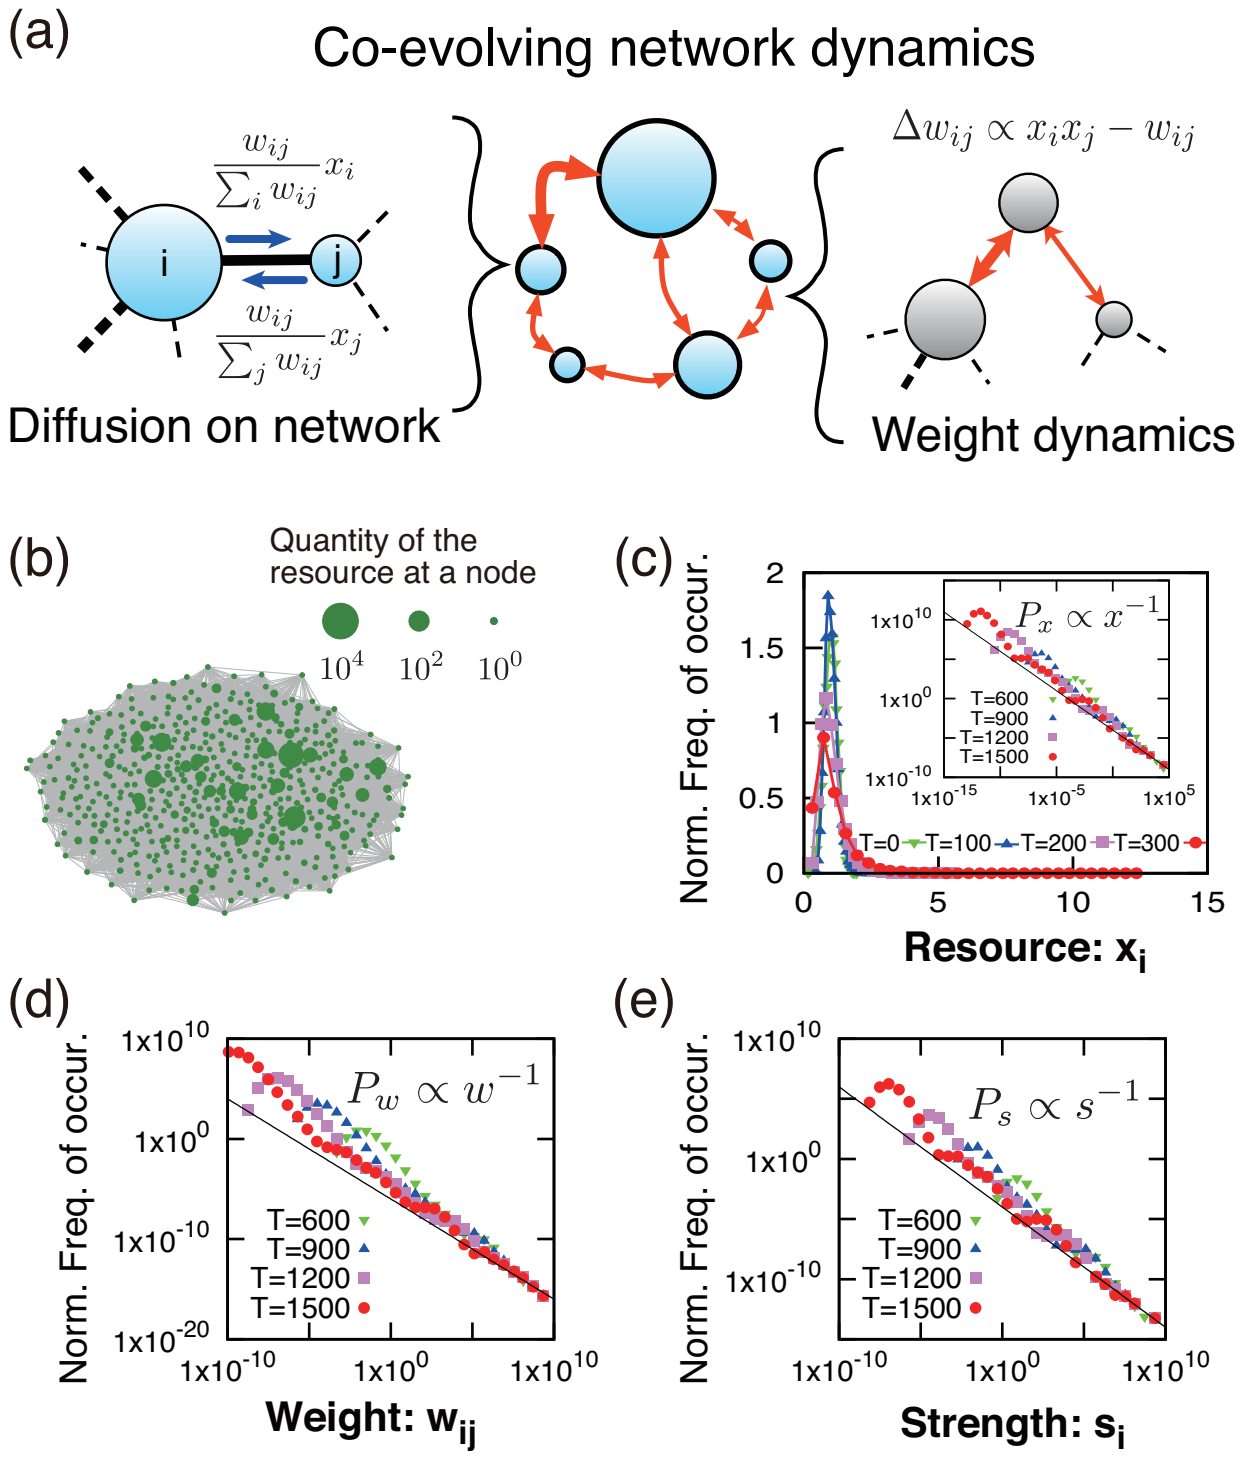

FIG. 1: (a) A schematic illustration of co-evolving dynamics, in which the topology of the network and the dynamical states of the nodes influence each other. In our model, some resource x_i of the ith node is transported diffusively to the neighboring nodes through the weighted links w_{ij}, while the weights of the links evolve in a resource-dependent fashion. (b) A typical network structure emerging through the co-evolving dynamics described by equations (1) and (2) with $\epsilon = 0.01$. The initial topology is chosen to be the Erdös-Rényi random graph with link probability p=0.1 and network size N=512. The size of node represents the amount of the resource x_i at that node on a log-scale. The link structure of the network becomes blurred because the number of links becomes very large. (c) The resource distribution asymptotically converges to a power-law with exponent -1. The inset displays a log-log plot, with a fitting line satisfying $P_x \propto x^{-1}$. The parameter values are the same as in (b), except that $N = 16384$ and $p = 0.01$. (d,e) Correspondingly, the weights w_{ij} and the strengths s_i ($\equiv \sum_{j \in \mathcal{N}_i} w_{ij}$) also exhibits power-law distributions with the same exponent. In all simulations, the initial resources and weights were generated by a normal distribution with mean $\mu = 1$ and standard deviation $\sigma = 0.1$ (for weights), 0.25 (for resources).

equations for diffusion of the resources are thus given by

$$x_i(t+1) - x_i(t) = \sum_{j \in \mathcal{N}_i} \frac{w_{ij}(t)}{s_j(t)} x_j(t) - x_i(t). \qquad (1)$$

The first and second terms are the inward and outward current of the resource with respect to the node i, respectively. Note that the total quantity of the resource is conserved, i.e. , $\sum_i x_i(t)/N = 1$.

We assume that the evolution of the weight $w_{ij}(t)$ depends on the product of the quantities of the resource at the endpoint nodes of the link, $x_i(t)x_j(t)$. In particular, as one of the simplest cases, we first examine the situation in which the weight $w_{ij}(t)$ relaxes to $x_i(t)x_j(t)$ (the law of mass action). Therefore, the dynamics of the weights is described by

$$w_{ij}(t+1) - w_{ij}(t) = \epsilon \left[x_i(t)x_j(t) - w_{ij}(t) \right], \qquad (2)$$

where the parameter ϵ represents the relaxation time scale of the weight dynamics.

The topology associated with the link structure of the network is characterized by the adjacency matrix a_{ij}. In this model, we assume that a_{ij} is time independent. Thus, only the weights $w_{ij}(t)$ of the links (a_{ij}=1) change, according to equation (2). In the following, first we choose various types of the topologies a_{ij}, and then we investigate the co-evolving dynamics of the weights $w_{ij}(t)$ and the quantities of resource $x_i(t)$ on the network with each given topology a_{ij}. It should be noted that the co-evolving dynamics do not exclude the possibility that some links are effectively disconnected, that is $a_{ij} = 1$ but $w_{ij}(t) \to 0$.

Interestingly, we found that the simple dynamics presented above can yield power-law distributions of the resources and the weights even when the underlying topology of the network is not scale-free. Figures 1(b)-(e) display a typical result of the numerical simulations of equations (1) and (2) with $\epsilon = 0.01$, where a Erdös-Rényi (ER) random graph is used for the topology of the network a_{ij}. A typical example of the network is shown in Fig. 1(b), where a few resource-rich nodes can be seen. In Fig. 1(c), we see that the distribution of resources becomes broader with time and asymptotically converges to a power-law distribution with an exponent of -1. This distribution is called Zipf's law [10]. Evidence of this empirical law is observed in many physical and social phenomena, such as word frequencies in natural languages, populations of cities, statistics of Web access, and company sizes and economic activity [11]. Similarly, the weights w_{ij} and strengths s_i also exhibit power-law distributions with the same exponent (see Fig. 1(d)-(e)). The strength s_i ($\equiv \sum_{j \in \mathcal{N}_i} w_{ij}$) is an important measure of weighted networks. It can be regarded as a natural generalized version of the degree, taking into account the importance of the weights of links. Therefore, it is understood that a power-law distribution of the strengths in the weighted network corresponds to a scale-free topology in a network without weighted links. Hence, we can conclude that a scale-free structure emerges through the co-evolving network dynamics. The results of our extensive numerical simulations under various conditions suggest that the emergence of this scale-free structure is generic. In particular, the exponent of the power-law distribution is -1 under various conditions of underlying topologies, initial conditions and the parameter ϵ.

To determine the types of resource dependence of the weight dynamics that can generate a scale-free weighted network, instead of equation (2) we consider the general-

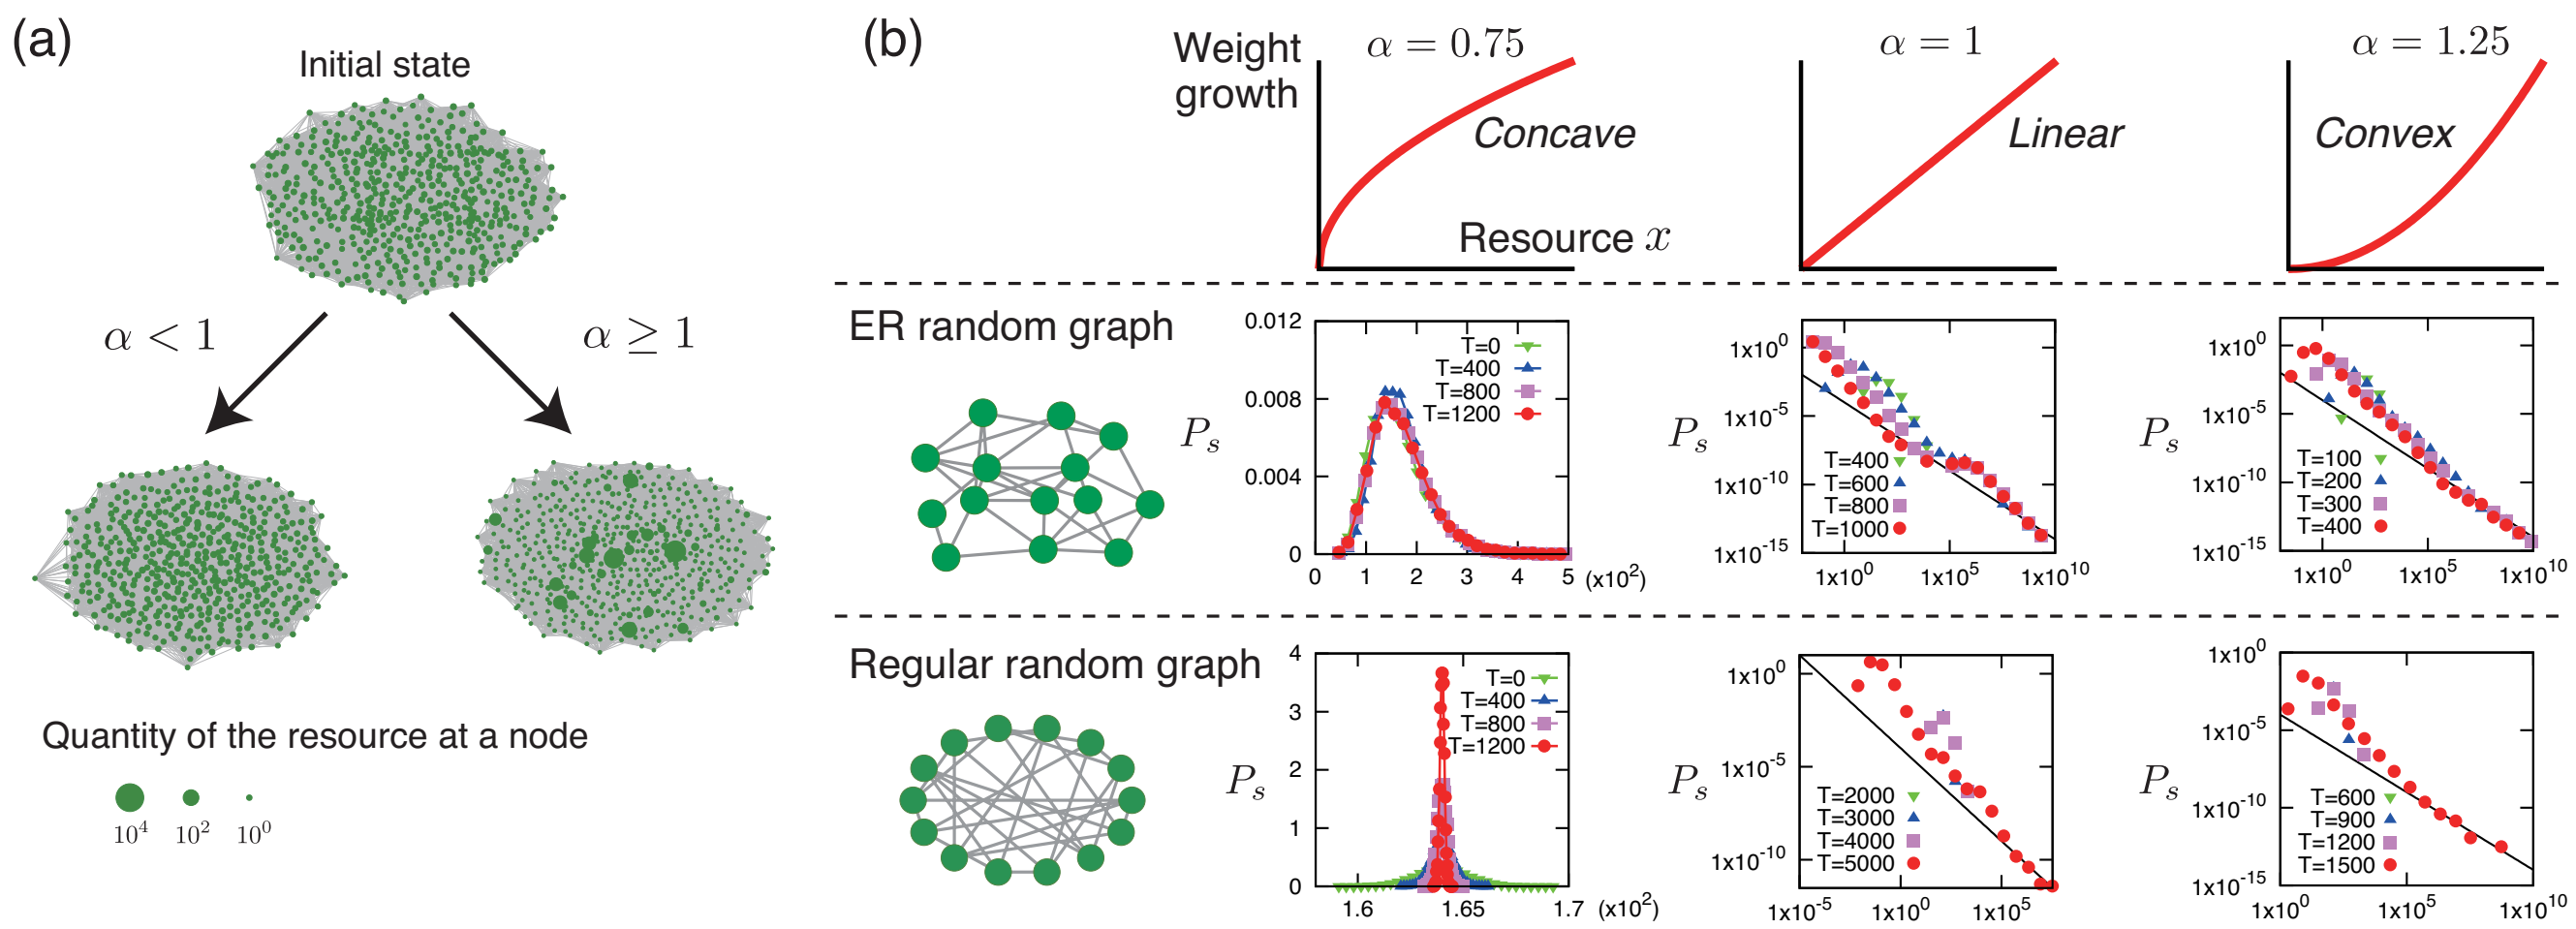

FIG. 2: Two types of network formation resulting from different types of resource dependence of the weight dynamics. A resource dependence characterized by the parameter α as $\Delta w_{ij} \propto (x_i x_j)^\alpha - w_{ij}$, is introduced. (a) Starting from an initial ER random graph with link probability $p = 0.1$ (middle graph), the co-evolving network dynamics yields a scale-free structure with a power-law resource distribution for $\alpha = 1.125$ (right graph) and a non-scale-free structure for $\alpha = 0.5$ (left graph). (b) The dependence of the strength distribution on the imposed topology of the network and the type of the weight dynamics. The top three graphs correspond to three types of weight growth as a function of the quantity of the resource $\Delta w_{ij} \sim x_i^\alpha x_j^\alpha \propto x^\alpha$: increasing concave ($\alpha = 0.75$), linear ($\alpha = 1$) and convex functions ($\alpha = 1.25$). The middle and bottom graphs plot the strength distributions obtained in numerical simulations for the ER random graph and the regular random graph, respectively. The network size $N = 16384$, the mean degree $\langle k \rangle \simeq 0.01N$, and the other parameter values are the same as in Fig. 1.

ized form

$$w_{ij}(t+1) - w_{ij}(t) = \epsilon \left[(x_i(t) x_j(t))^\alpha - w_{ij}(t) \right], \qquad (3)$$

where α is a parameter controlling the non-linearity of the resource dependence.

We investigated how the resource dependence of the weight dynamics affects the network formation. Figure 2 summarizes the obtained results, in which two distinct types of network structures appear through the co-evolving network dynamics, as determined by the value of α. In the case $\alpha \geq 1$, we see that a few very resource-rich nodes (hub) and many resource-poor nodes coexist as a result of the emergence of the power-law resource distribution. Contrastingly, in the case $\alpha < 1$, the resources are almost evenly distributed at all nodes, and no prominent hubs appear in the network.

We analyze the asymptotic behavior of the system by making some approximations to obtain meaningful results. Let us first consider separately two types of dynamics of the resources and weights. First, if the link weights are static, the resources x_i converge to the equilibrium solution $x_i^* = s_i / (\sum_k s_k / N)$ of equation (1). Second, the weights would relax to the solution $w_{ij}^* = (x_i x_j)^\alpha$ if the resources x_i were held fixed. Then, in the actual co-evolving dynamics, the asymptotic stage of the system is expected to satisfy $x_i^* = s_i / (\sum_k s_k / N)$ and $w_{ij}^* = (x_i x_j)^\alpha$. However, the situation is more complicated, owing to the simultaneous change of x_i and w_{ij}. For this reason, the asymptotic dynamics are qualitatively approximated by updating the variables x_i and w_{ij} in an alternating manner using two maps, $x_i(n+1) = s_i(n) / (\sum_k s_k(n)/N)$ and then $w_{ij}(n+2) = (x_i(n+1) x_j(n+1))^\alpha$, where n denotes the number of the iteration. Although this approximation might be too crude, the obtained results exhibit reasonable agreement with the numerical simulations, as shown below. Eliminating $x_i(n)$ and using the update rule for the strength s_i ($\equiv \sum_{j \in \mathcal{N}_i}^N w_{ij}$), we obtain $s_i(n+1) = c_n s_i(n)^\alpha \sum_{j=1}^N a_{ij} s_j(n)^\alpha$, where $c_n = 1 / (\sum_k s_k(n)/N)^{2\alpha}$. In addition, we assume that the network topology a_{ij} is given by a regular random graph, which means that each a_{ij} is random, but $\sum_j a_{ij}$ is a constant, k_0. Ignoring the constant multiplier independent of the subscription i, we finally obtain the following relation for the strength after n iterations with the initial value $s_i(0)$:

$$s_i(n) \propto s_i(0)^{\alpha^n}. \qquad (4)$$

The asymptotic behavior resulting from the dynamics described by the above rules can be classified into three cases, corresponding to three cases for the value of α: $\alpha > 1$, $\alpha < 1$ and $\alpha = 1$.

In the case $\alpha > 1$, for a given initial strength distribution $P^0(s)$, we have $P^n(s) \propto P^0(s^{\alpha^{-n}}) s^{-1+\alpha^{-n}}$. For example, if $P^0(s)$ is a normal distribution with zero mean and variance σ^2, we obtain $P^n(s) \propto \exp(-s^{2\alpha^{-n}} / 2\sigma^2) s^{-1+\alpha^{-n}}$. In the asymptotic limit $n \to \infty$, the distribution $P^n(s)$ behaves as $P^n(s) \to s^{-1}$. In Fig. 2(b), it is seen that this power-law strength distribution appears not only in the case of a regular random graph but also in the case of an ER random graph.

This suggests that the above analytic result holds for a more general network topology. The essential mechanism underlying the emergence of scale-free structure can be intuitively understood by considering the fact that the weight growth for $\alpha > 1$ is describe by an increasing convex function of the resource quantity, as shown in the top graph of Fig. 2(b). This convexity implies that the link weight of a node increases when the quantity of the resource at that node increases. This leads to the emergence of hub nodes. This scaling-up effect of the resource size can be interpreted as an expression of the "rich-get-richer law" or "economies of scale".

In the opposite case $\alpha < 1$, $s_i(n)$ in equation (4) converges to a uniform constant in the limit $n \to \infty$, i.e., $s_i(n) \propto s^0 = 1$ for all i. This means that the strengths of nodes are homogenized to a typical size. The validity of this theoretical prediction is numerically confirmed for regular random graphs in Fig. 2(b). For ER random graphs, owing to the variability of the degree, the strengths cannot converge to identical values but, rather, converge to a Gaussian-like distribution with finite variance. Note that both strength distributions for $\alpha < 1$ have a characteristic scale, indicating a finite mean strength. This contrasts with the power-law distribution in the case $\alpha > 1$. As shown in Fig. 2(b), the weight growth function for $\alpha < 1$ is an increasing concave function. Thus, in this case, the increase in the weight slows as the quantity of the resource increases. This leads to the situation in which that an almost homogenous network with no hubs is realized in the asymptotic state.

In the critical case $\alpha = 1$, a very delicate situation arises. Theoretically, according to equation (4), the strength after n iterations is given by $s(n) = s(0)$, and thus the strength distribution does not change, i.e., $P^n(s) = P^0(s)$. However, this result is inconsistent with the numerical results, as we have already seen that a power-law strength distribution is realized even for a regular random graph (Fig. 2). We conjecture that the approximation inherent in the alternating update is not sufficiently accurate to capture the exact nature of the co-evolving dynamics for $\alpha = 1$. The only exception is the case of a complete graph. In this case, the strength distribution remains unchanged, as predicted by the analytic treatment. However, the asymptotic distribution changes drastically, becoming a power-law distribution, when only a few links are removed from the complete graph (data not shown). Thus, the system robustly acquires a scale-free structure in realistic situations.

In this paper, we have proposed a simple, fundamental model of a co-evolving weighted network, in which the quantity of the resource at a node diffuses over a weighted network and simultaneously, the link weights evolve in a resource-dependent manner (the law of mass action). We have demonstrated numerically and analytically that, as a result of the co-evolving dynamics, the weight and resource distributions exhibit power-law forms, with exponent -1. Moreover, we have investigated what type of resource dependence in the weight dynamics allows the system to acquire scale-free structure. This behavior can qualitatively be explained by a map equation that approximately describes the dynamics of the strength distribution in closed form.

These findings provide novel insight into the functional meaning of network structure, because an organized network structure is directly related to resource diffusion on network through co-evolving dynamics. In general, diffusion processes are fundamental in many phenomena in real-world networks. Therefore, this simple framework of co-evolving dynamics is applicable to a wide range of diffusion-based systems, such as chemical reaction-diffusion, prey-predator systems and population dynamics, which is practically meaningful in real-world systems. We believe that, the study of co-evolving dynamics should helps us to elucidate the functional network structures pertinent to the resource distribution over a network and provide a perspective for designing adaptive structures of networks.

This work was supported by KAKENHI(19GS0208, 21120002, 23115511).

---

* Electronic address: aoki@acs.i.kyoto-u.ac.jp

[1] G. Palla, A.-L. Barabási, and T. Vicsek, Nature **446**, 664 (2007).

[2] G. Kossinets and D. J. Watts, Science **311**, 88 (2006).

[3] V. Kalapala, V. Sanwalani, A. Clauset, and C. Moore, Phys. Rev. E **73**, 026130 (2006). A. Barrat, M. Barthelemy, R. Pastor-Satorras, and A. Vespignani, Proc. Natl. Acad. Sci. USA **101**, 3747 (2004).

[4] D. J. Watts and S. H. Strogatz, Nature **393**, 440 (1998).

[5] A.-L. Barabási and R. Albert, Science **286**, 509 (1999).

[6] M. E. J. Newman, SIAM Rev. **45**, 167 (2003).

[7] D. J. Price, Science **149**, 510 (1965).

[8] S. Boccaletti, V. Latora, Y. Moreno, M. Chavez, and D. U. Hwang, Phys. Rep. **424**, 175 (2006).

[9] T. Gross and B. Blasius, J. R. Soc. Interface **5**, 259 (2008). G. Böhme and T. Gross, Phys. Rev. E **83**, 035101 (2011). F. Vazquez, V. Eguíluz, and M. Miguel, Phys. Rev. Lett. **100**, 108702 (2008). C. Nardini, B. Kozma, and A. Barrat, Phys. Rev. Lett. **100**, 158701 (2008). P. Holme and M. E. J. Newman, Phys. Rev. E **74**, 056108 (2006). T. Aoki and T. Aoyagi, Phys. Rev. Lett. **102**, 034101 (2009). M. Perc and A. Szolnoki, Biosystems **99**, 109 (2010).

[10] G. K. Zipf, *Selective Studies and the Principle of Relative Frequency in Language* (Harvard University Press, Cambridge, MA, 1932).

[11] G. Miller and E. Newman, Am. J. Psychol. **71**, 209 (1958). X. Gabaix, Q. J. Econ. **114**, 739 (1999). B. A. Huberman, P. L. T. Pirolli, J. E. Pitkow, and R. M. Lukose, Science **280**, 95 (1998). H. Aoyama *et al.*, Fractals **8**, 293 (2000). A. Dragulescu and V. M. Yakovenko, Physica A **299**, 213 (2001).